




SMOKEbarrier AT-E

WALK THROUGH ACTIVE TEXTILE
SMOKE BARRIER



FIRE RESISTANCE CLASSIFICATION:
D 120

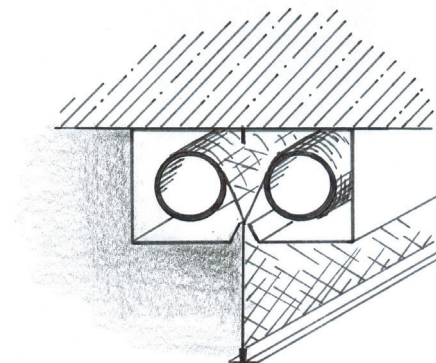

PRODUCT DESCRIPTION

- › Made of special, fire-resistant textile 0.4 mm thick, filled up with glass fibres with surface coating.
- › Unique construction – unlimited length of the barrier and standard height of lowering up to 3.5 m.
- › The barrier can be in a right angle, other angles are subject to consultation.
- › Small space requirements, designed for face fixing or fixing between assembly (possible combination of both), fixing into concrete, masonry or steel profiles with required fire resistance.
- › Standard dimension of the shutter box (W × H)
 - » 254 × 150 mm – multi-shaft system with shafts side by side.
 - » 152 × 256 mm – multi-shaft system with shafts one above the other.
- › Very light (textile = 0,45 kg/m²).
- › Controlled electrically by means of a tube drive (230 V) with system of safety gravitation closure.
- › **Control panel AOP** (AVAPS Operation Panel)
 - » Ensures electronic control of individual shutter functions.
 - » Enables self-closing from the EPS system (volt-free contact) or by local autonomous fire sensors, even in the event of a power failure thanks to a system of safe gravity closure.
 - » Option to connect to a key switch or control buttons.
 - » Option to add optical and acoustic signalling.
 - » Option to report end positions and power failure to external devices.
- › Closing speed is approximately 100 mm/s.
- › Steel parts are made from galvanized metal, upon request powder coated using RAL sampler.



EXIT

WHITE

GREY

BLACK

CERTIFICATION


Smoke barrier **SMOKEbarrier AT-E** has been successfully tested in fire testing centre FIRES s.r.o., classified as per EN 12101-1, and covered by CE certificate No. 1396-CPR-0027. / For more information, contact: projekce@avaps.cz

Manufacturer issues declaration of performance for individual orders in compliance with Regulation of the European Parliament and Council (EU) No. 305/2011.




TECHNICAL INFORMATION


VIEW - TYPE AT-H-E

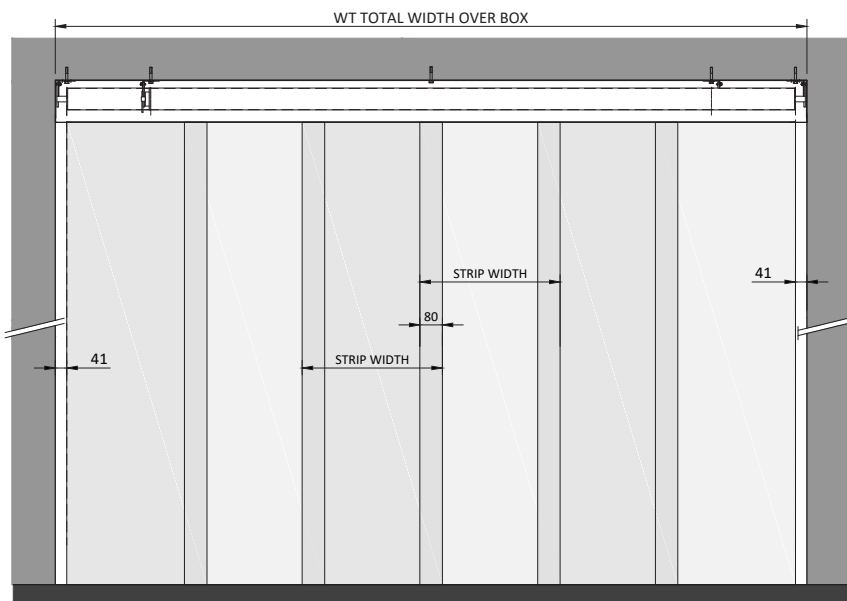

PLAN VIEW - TYPE AT-H-E

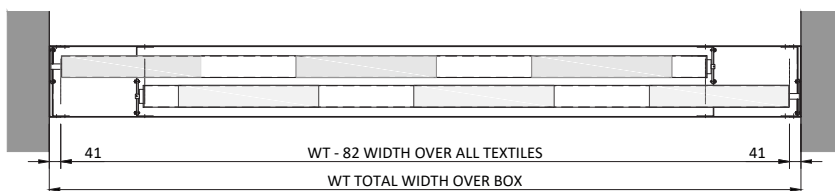


SECTION
TYPE AT-H-E

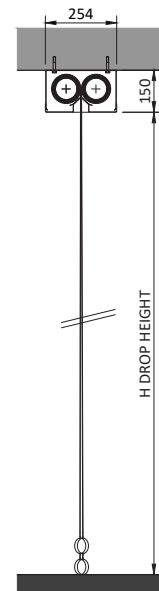


TYPES


TYPE AT-H-E



TYPE AT-V-E
Fixed between



TYPE AT-V-E
Face fixed



X = 140 - 360 mm
depends on
required dimension

This drawing and copyright belong to AVAPS s.r.o. Do not copy without AVAPS s.r.o. authorisation.

MAINTENANCE AND REPAIR SERVICES

We provide professional warranty and post-warranty service and revisions according to applicable laws for all our products.

Contact: +420 777 911 770 / service@avaps.eu

