




SMOKEbarrier SG

GLASS STATIC SMOKE BARRIER




FIRE RESISTANCE CLASSIFICATION:
D 120 or DH 30

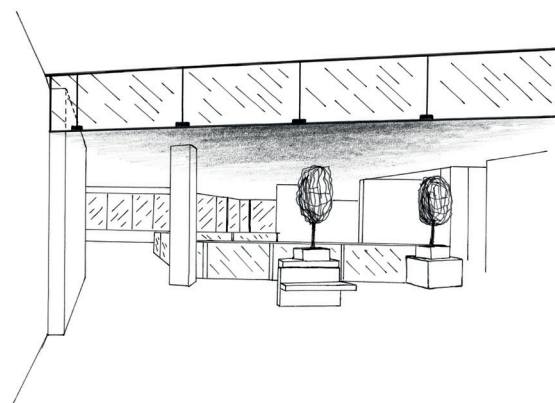


PRODUCT DESCRIPTION

- › Small space requirements, the design of the barrier enables assembly without any additional special structures, fixed between concrete, masonry or steel profiles.
- › Glass sheets can be connected in line, creating an unlimited length of the barriers.
- › Relatively low weight 15 kg/m².
- › Special clear fire resistant glass 6 mm thick.
- › Max. dimensions of glass sheet (W × H):
 - » 2 500 × 1 800 mm (resistance D 120)
 - » 2 000 × 1 100 mm and 1 000 × 1 600 mm (resistance DH 30)
- › All visible steel components are made in stainless steel.

ANCHOR ELEMENTS:

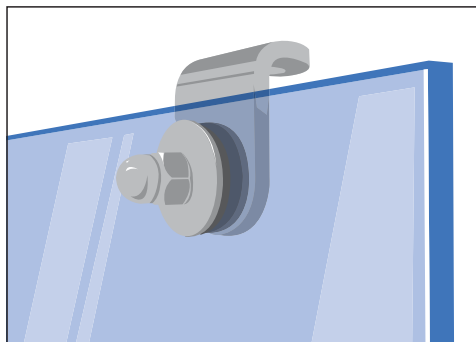

Option ECO

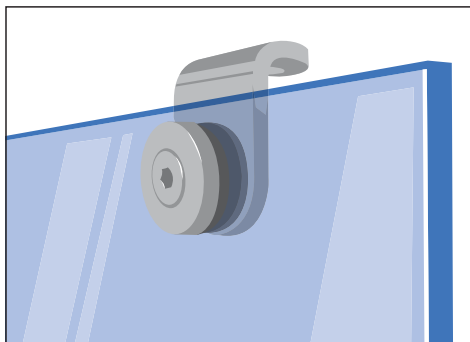

Option DESIGN



DESIGN




CERTIFICATION

Smoke barrier **SMOKEbarrier SG** has been successfully tested in fire testing centre Efectis – France, classified as per EN 12101-1, and covered by CE certificate No. 0336-CPR-5064-E/06. / For more information, contact: projekce@avaps.cz

Manufacturer issues declaration of performance for individual orders in compliance with Regulation of the European Parliament and Council (EU) No. 305/2011.



TECHNICAL INFORMATION

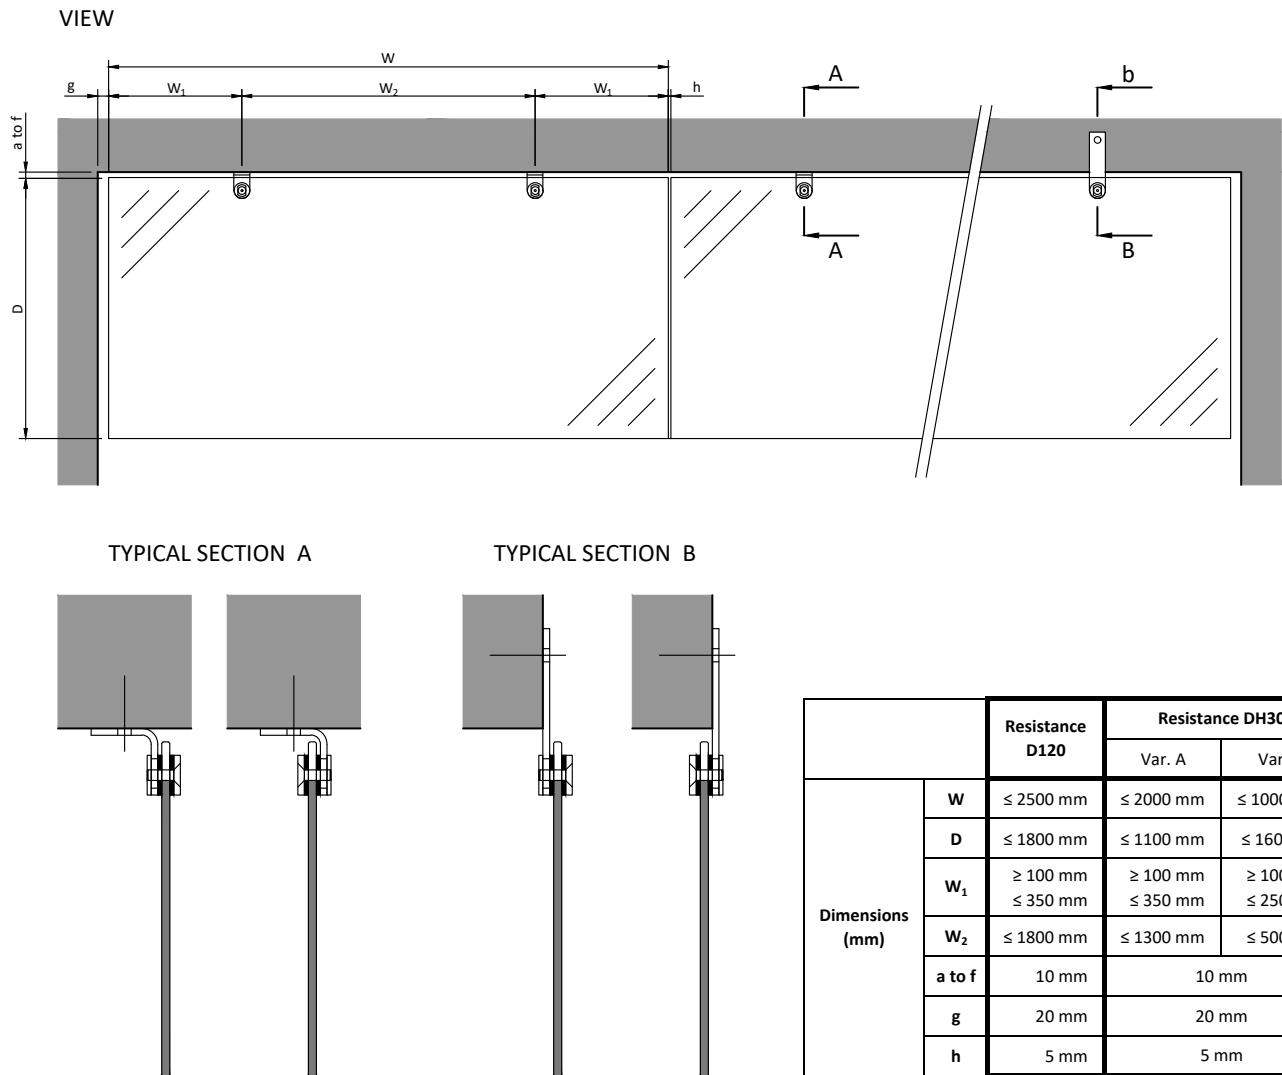

This drawing and copyright belong to AVAPS s.r.o. Do not copy without AVAPS s.r.o. authorisation.

MAINTENANCE AND REPAIR SERVICES

We provide professional warranty and post-warranty service and revisions according to applicable laws for all our products.

Contact: +420 777 911 770 / service@avaps.eu

